



☒ RoHS☒ REACH

正视图

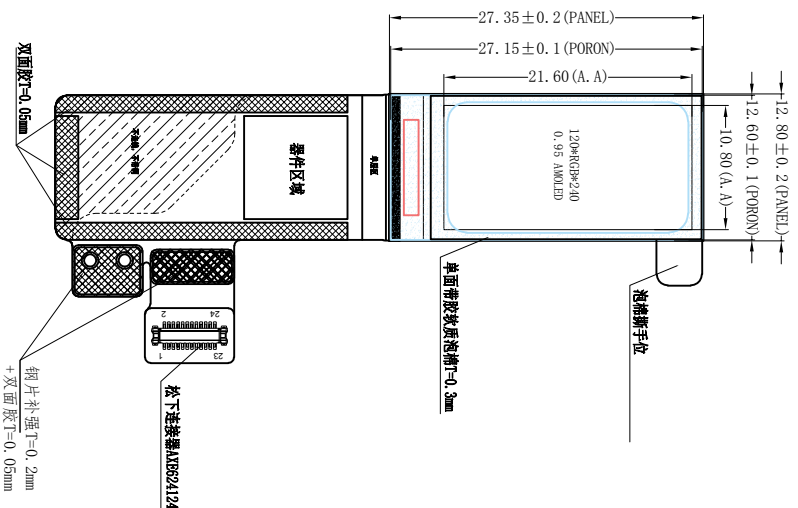


侧视图

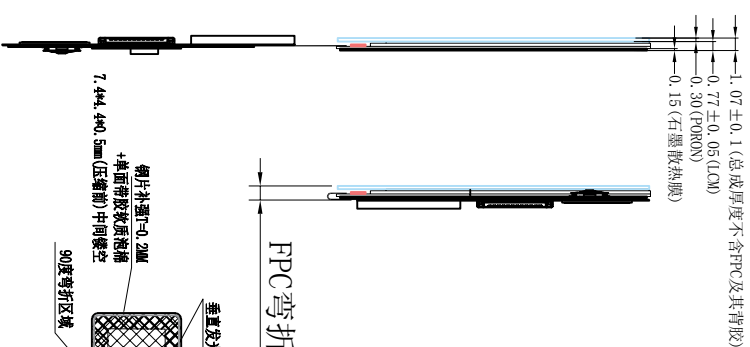

背视图

背视弯折图

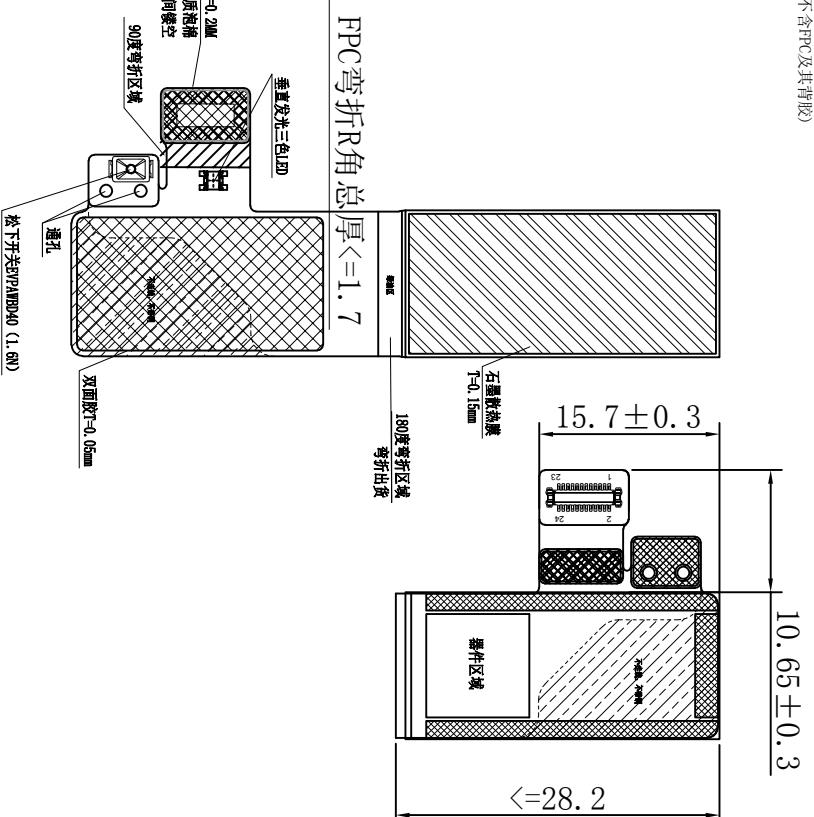

PIN: SYMBLE
1 ELVDD
2 GND
3 ELVSS
4 GND
5 SWIRE
6 GND
7 VCI
8 GND
9 VDD1V85
10 GND
11 GND
12 IP2 (GND)
13 NC
14 IP1 (GND)
15 LCD CS
16 LCD_TE
17 LCD_CLK
18 LCD_RESET
19 LCD_DC
20 LCD_SDA
21 LED_R
22 VBAT
23 LED_G
24 EM_KEY

NOTE:

1. DISPLAY TYPE: 0.95" AMOLED
2. DRIVER IC: FT2201
3. VIEWING DIRECTION: FREE
4. OPERATING TEMPERATURE: -20 ° C + 70 ° C.
5. STORAGE TEMPERATURE: -30 ° C + 80 ° C.

REVISION RECORD		DATE		NISIN SHENZHEN NISIN OPTOELECTRONICS CO., LTD			
△	初版	2005.2.14					
△	修改PVC外形	2005.2.28					
△				DRAW TYPE : ASSY-Outline		DRAW NO. : NS096QW2403A201	
△		DRAWN		RCY	DATE	2005.2.28	UNIT : mm
△		CHECKED			DATE		PRO.(3) : 
△		APPROVED			DATE		SHEET : 1/1